





ACME-SHOREY

PRECAST CONCRETE PRODUCTS

NOTES:

1.) TOP OF BULKHEAD TO BE 2" ABOVE GRADE.

Sct.	Item#	BulkHead 'HC (in)	Stl Door 'HD (in)	W (in)	L (in)	FOOTING TO GRADE	(Bulkhead) Lbs
24 - 2.1	S	43"	52"	51.5"	45"	35"-41"	2,750
24 - 2.2	O	60"	30"	51.5"	60"	52"-58"	4250
24 - 2.3	B	68"	22"	55.5"	66"	59"-66"	5750
24 - 2.4	C	76"	19.5"	55.5"	74"	67"-74"	6750
24 - 2.5	D	84"	22"	55.5"	86"	75"-82"	8250

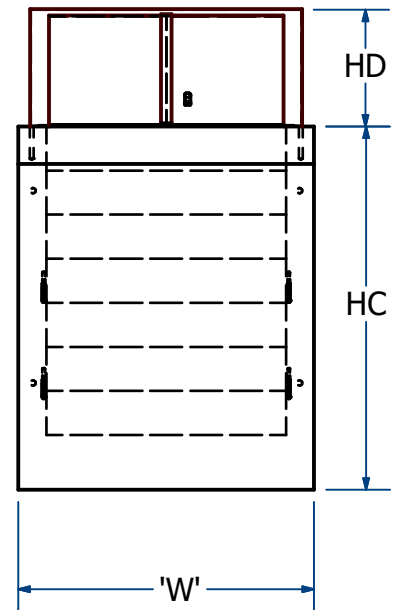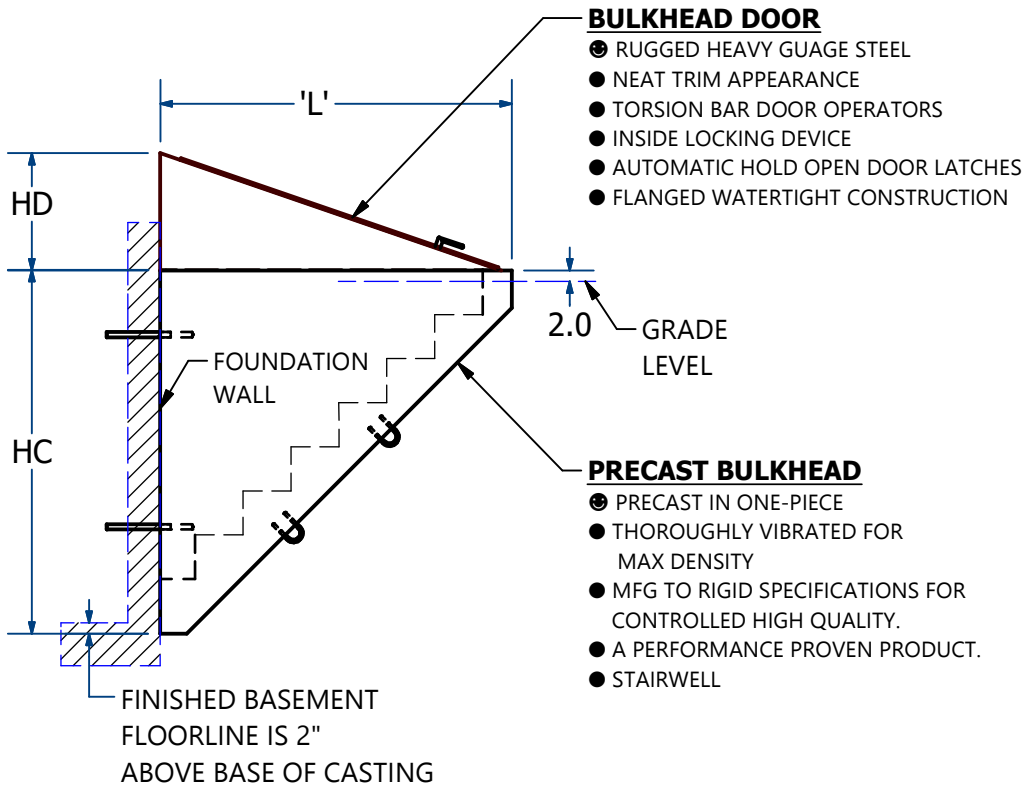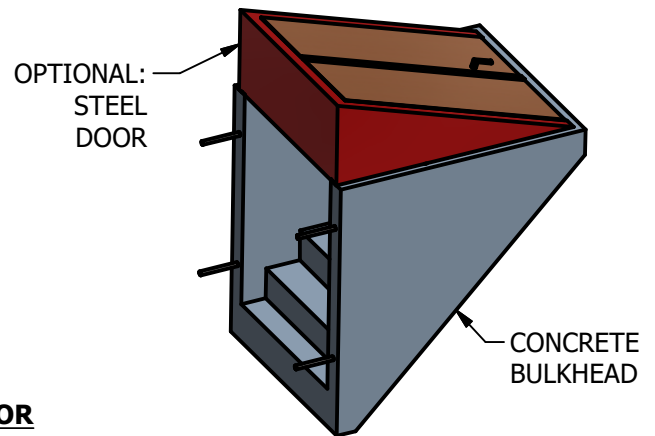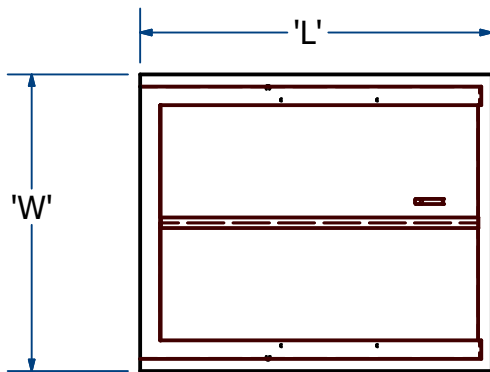

NAME: BASEMENT ENTRANCE SIZING CHART

(BULKHEAD ENTRANCE SIZING)

H-20

ITEM# BESC

Concrete Minimum Strength: 5,000 p.s.i. at 28 days
 Steel Reinforcement: ASTM A615, Grade 60
 Design Loading: standard units - AASHTO - H20

1.) WIDTH OF OPENING IN FOUNDATION WALL SHOULD BE 40" MAXIMUM FOR ALL TYPES.
 2.) WHEN FOUNDATION IS BACKFILLED LEAVE MIN. WORK AREA FOR PERMENTRY INSTALLATION.

C

DATE: 10-15-21

Ch 24

Pg 2.1

Sht 1 of 2